


Band Pass Filter

Elec. Spec. "50Ω"

[Inquiry](#)

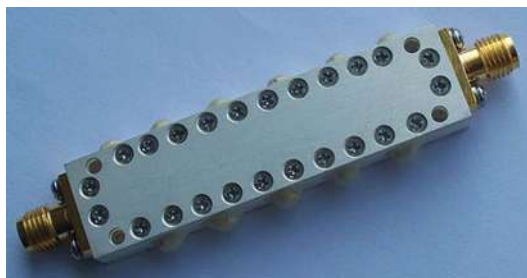

Freq. Range (GHz)	2.35 ~ 2.4
3dB Cut off (GHz)	/
Insertion Loss(dB)	1
VSWR	1.4
Power Handling (w)	2
Connectors	SMA-Female
Surface Finish	Black Paint
Operating Temp.(°C)	-30-+70°C

Features

- 1.Theoretical Insertion Loss not included in the Insertion Loss Parameter.
2. Multi-Octave bandwidth of working frequency range.
3. Superior phase balance and amplitude balance between any 2 ports.
4. Low VSWR and high Directivity.

Rejection

60dB@ DC ~ 2.25GHz; 60dB@ 2.5 ~ 3GHz

Outline Drawing Unit: mm

