

Low Noise Amplifier (Millimeter-wave)



Model: MLA052059-10

Microot Microwave co., Ltd.


Low Noise Amplifier



Features

1. Input power exceeding 20dBm may cause permanent damage.
- 2 . Operating voltage : +12V or +5V .
- 3 . These devices sensitive to electrostatic discharge (ESD) and can be damaged by static electricity. Proper ESD control techniques should used when handling these devices.

Outline Drawing Unit: mm

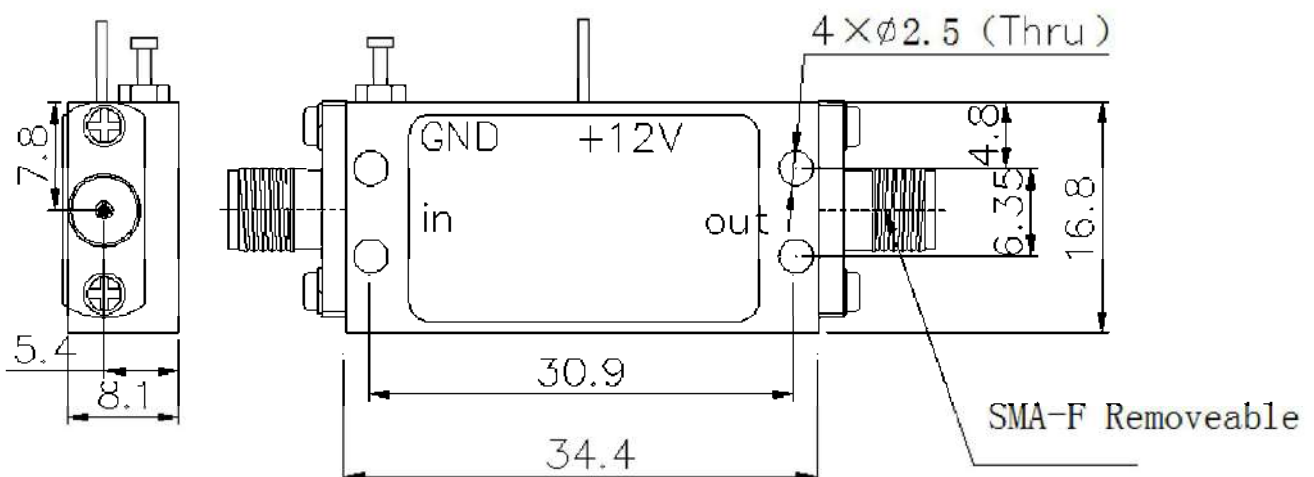

Elec. Spec. "50 Ω "

[Inquiry](#)

Freq. Range (GHz)	5.2 ~ 5.9
NF. (dB) Max	1.0
Gain (dB) Min	30
Gain Fla. (dB) Max	± 0.5
P-1 (dBm) Min	10
IP3 (dBm) Min	20
VSWR Max	1.5
Power Supply (Typ)	+5V / 130mA
Connectors	SMA-Female
Oper. Temp. (°C)	-20 ~ +70
Stor. Temp.(°C)	-55 ~ +85