

Low Noise Amplifier (Millimeter-wave)



Model: MLA085096-10

Microot Microwave co., Ltd.


Low Noise Amplifier



Features

1. Input power exceeding 20dBm may cause permanent damage.
- 2 . Operating voltage : +12V or +5V .
- 3 . These devices sensitive to electrostatic discharge (ESD) and can be damaged by static electricity. Proper ESD control techniques should used when handling these devices.

Outline Drawing Unit: mm

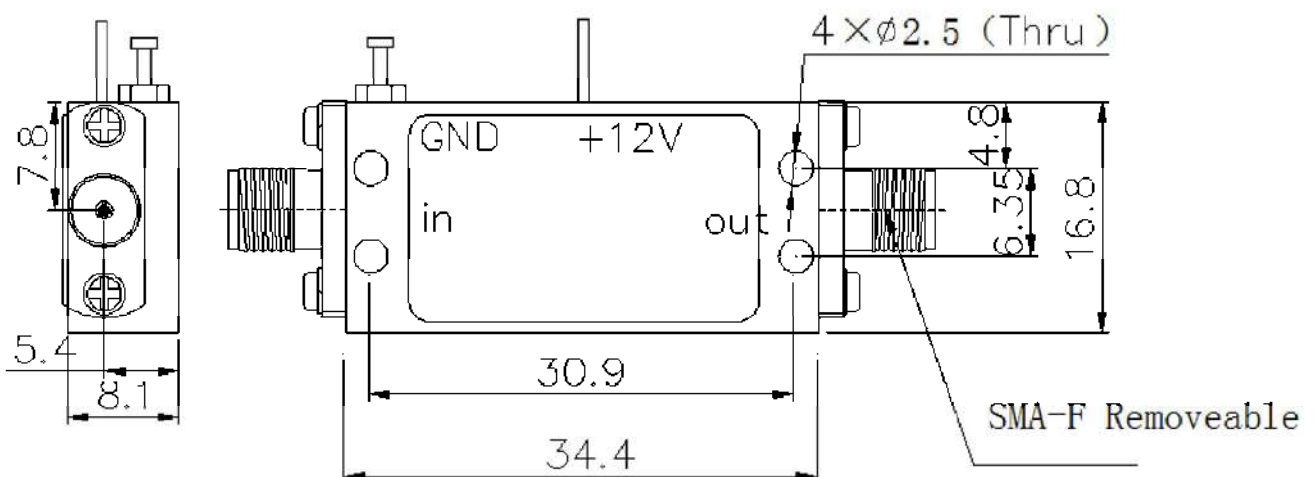

Elec. Spec. "50Ω"

[Inquiry](#)

Freq. Range (GHz)	8.5 ~ 9.6
NF. (dB) Max	0.9
Gain (dB) Min	30
Gain Fla. (dB) Max	±0.4
P-1 (dBm) Min	3
IP3 (dBm) Min	13
VSWR Max	1.8
Power Supply (Typ)	+5V / 30mA
Connectors	SMA-Female
Oper. Temp. (°C)	-20~+70
Stor. Temp.(°C)	-55~+85