


## 2-Way Power Divider



### Features

1. Theoretical Insertion Loss not included in the Insertion Loss Parameter.
2. Multi-Octave bandwidth of working frequency range.
3. Superior phase balance and amplitude balance between any 2 ports.
4. Low VSWR and high Output Isolation.

### Outline Drawing Unit: mm

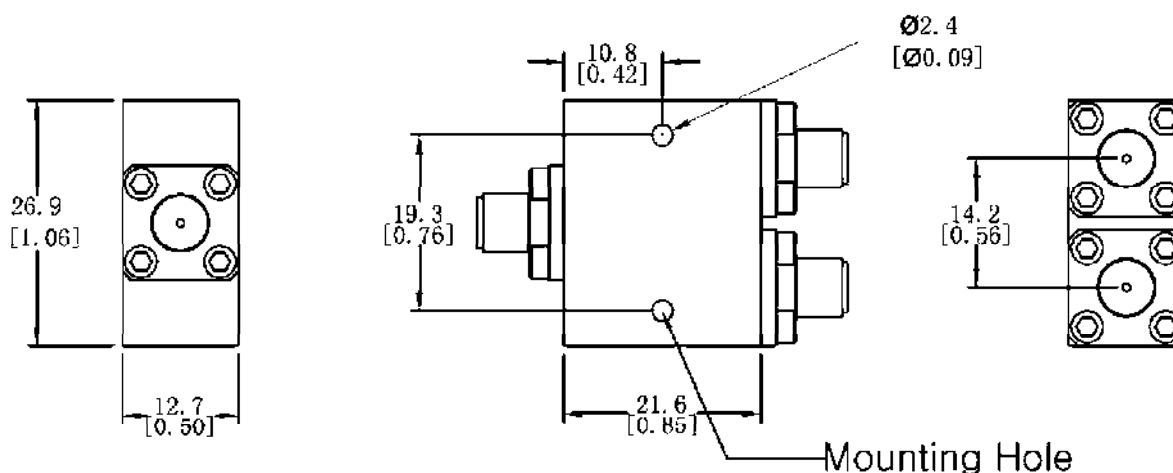

### Elec. Spec. "50Ω"

[Inquiry](#)

Freq. Range (GHz)	35.5-36
Input VSWR Max	1.3
Output VSWR Max	1.3
Insertion Loss (dB) Max	1.0
Amp. Bal. (dB) Max	±0.2
Pha. Bal. (deg) Max	±2
Isolation (dB) Min	20
CW Power (W) Max	20
Peak Power (KW) Max	3
Connector	2.92mm-F
Operating Temp. (°C)	-35~+105
Storage Temp. (°C)	-55~+125