Power Divider / Combiner

Model: MPD4-020180

MICROOT

Microot Microwave co., Ltd.

4-Way Power Divider

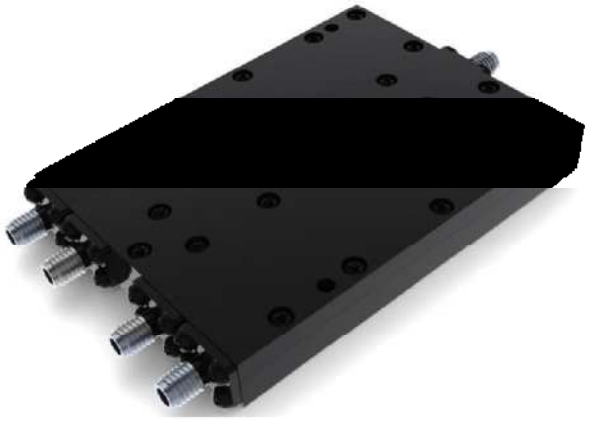

Elec. Spec. "50Ω"

Inquiry

Freq. Range (GHz)	2-18
Input VSWR Max	1.8
Output VSWR Max	1.8
Insertion Loss (dB) Max	2
Amp. Bal. (dB) Max	±0.6
Pha. Bal. (deg) Max	±6
Isolation (dB) Min	15
CW Power (W) Max	20
Peak Power (KW) Max	3
Connector	SMA-Female
Operating Temp. (°C)	-35~+105
Storage Temp. (°C)	-55~+125

Features

1.Theortical Insertion Loss not included in the Insertion Loss Parameter.

2. Multi-Octave bandwith of working frequency range.

3. Superior phase balance and amplitude balance between any 2 ports.

4. Low VSWR and high Output Isoliation.

Outline Drawing Unit: mm

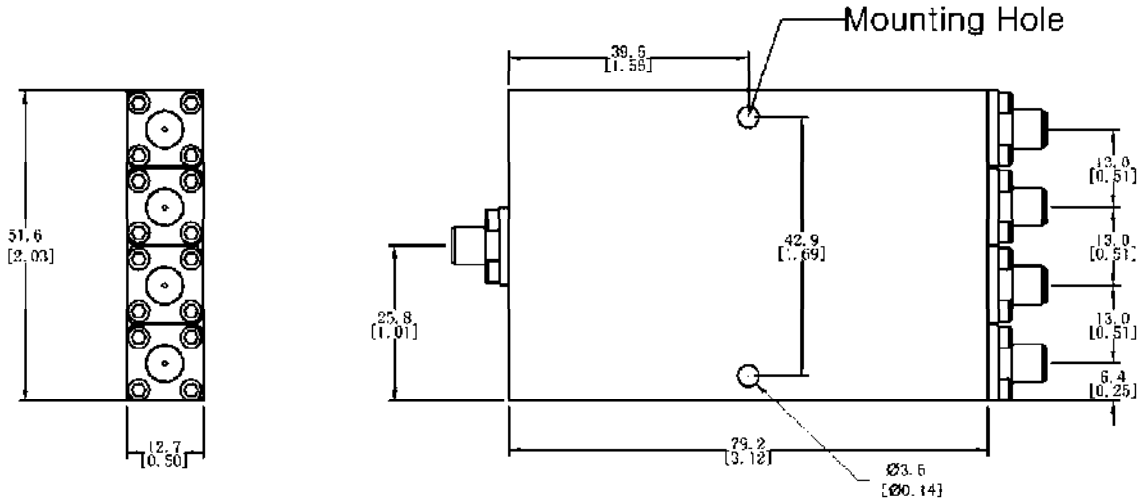

Add: #D505,Dahecang, No.511,Xingshi Rd,Western Section 1,3rd Ringroad, Chengdu,CHINA
Tel: 86-28-85542308, Fax: 86-28-85007280, E-mail: info@mic-root.com,Website: www.mic-root.com