


Power Divider / Combiner

Model: MPD6-020080A



Microot Microwave co., Ltd.

6-Way Power Divider

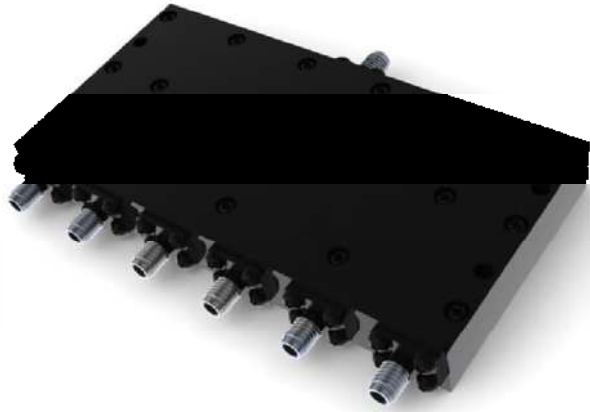

Elec. Spec. "50Ω"

[Inquiry](#)

Freq. Range (GHz)	2-8
Input VSWR Max	1.5
Output VSWR Max	1.5
Insertion Loss (dB) Max	1.6
Amp. Bal. (dB) Max	±1
Pha. Bal. (deg) Max	±9
Isolation (dB) Min	18
CW Power (W) Max	10
Peak Power (KW) Max	/
Connector	SMA-Female
Operating Temp. (°C)	-40~+70
Storage Temp. (°C)	-55~+85

Features

- 1.Theoretical Insertion Loss not included in the Insertion Loss Parameter.
2. Multi-Octave bandwidth of working frequency range.
3. Superior phase balance and amplitude balance between any 2 ports.
4. Low VSWR and high Output Isolation.

Outline Drawing Unit: mm

